



4" PSC Motor Set PRODUCT CATALOG



Franklin Electric



Franklin Electric



Quality in the Well



Franklin Electric

4" Super Stainless PSC Motor Set

Submersible Motor Set

Quality in the Well

In an effort to ease our customers ordering, stock holding and inventory management, Franklin Electric Europa GmbH is introducing the PSC Motor Kit.

Consisting of the submersible motor, control box, motor short lead and splicing kit all packaged into one compact yet sturdy box, this kit is the ideal stock item to drive your pump.



Product advantages:

- One stop shop – no hassle selecting different components to work together
- Everything available at the same time
- All components matched and warranted by Franklin Electric
- Maximum flexibility – one motor kit can drive as many as 5 different pump models
- Any practical drop cable length (up to 10mm²) can be spliced using included kit

Technical Specifications

- Motor range 0,25 - 2,2kW
- 4" PSC Motor with NEMA flange
- Motor protection level: IP 68
- Box protection level: IP 54
- Voltage: 220 - 240V; - 6 / +10 %; 50Hz single phase

Options

- Motor cable VDE / ACS / KTW approved (1,5m; special lengths available)

PSC Motor Set Model numbers

P _N [kW]	U _N [V]	Model No. Standard PSC
0,25	220-230	254 803 6700C
	230-240	254 813 6700C
0,37	220-230	254 805 6700C
	230-240	254 815 6700C
0,55	220-230	254 807 6700C
	230-240	254 817 6700C
0,75	220-230	254 808 6700C
	230-240	254 818 6700C
1,10	220-230	254 809 6700C
	230-240	254 819 6700C
1,50	220-230	254 810 6700C
	230-240	254 820 6700C
2,20	220-230	254 811 6700C
	230-240	254 821 6700C



Franklin Electric

PSC Motor Set Description

The PSC Motor

Submersible Motors

Quality in the Well

Franklin Electric 4" encapsulated submersible motors, built in ISO 9001 certified facilities for outstanding performance in 4" or larger water wells.

The single phase PSC motor has been electrically optimized to offer reliable pump starting over a wide range of incoming voltages. It should ideally be combined to the Franklin Electric SubStart/SubTronicSC control boxes for maximum system performance, protection and warranty.



Product advantages:

- Hermetically sealed stator. Anti track, self healing stator resin prevents motor burn out, mechanically supports the winding and provides fast heat dissipation.
- High efficiency electrical design (low operation cost, cool running winding)
- Removable water bloc lead connector
- Cable material according to drinking water regulations (VDE / ACS / KTW approved)
- No-wear, water lubricated radial and thrust bearings for 100% maintenance free operation
- Non-contaminating FES 93 filling liquid
- Various agency approvals for use in drinking water

Technical specification:

- PSC motor range: 0,25 – 2,2kW
- 4" NEMA flange
- Rotation: CCW facing shaft end (CW upon request)
- Degree of protection: IP68
- Insulation: Cl.B
- Rated ambient temperature: max. 30°C
- Required cooling flow: min. 0,08m/s
- Max. starts/hr.: 20, equally distributed
- Mounting: vertical to horizontal, shaft upwards
- Voltage tolerance 50Hz from nominal: -10% / +6%
- Protection requirements: EN 60947-4-1

The SubStartSC® Single phase Submersible Motor Starter

The SubStartSC® range covers all PSC motors from 0.25kW to 2.2kW for all voltages. Ergonomic design, attention to detail and unique features make the SubStartSC® motor starter range your first choice when considering submersible motor protection. In conjunction with Franklin Electric submersible motors you now have an tangible water system advantage resulting in ease of installation and reliable protection.

Product features:

- Attention to detail – every aspect engineered for the application
- The complete package – The device is 100% compatible with the motor characteristics
- All in one name – Reliability backed by the leader in submersible motors



The Lead Termination Kit 1,5 - 10mm²

- 3M Quality
- 4 wire
- 1,5 - 10mm²
- up to 1,1kV





SubStartSC® Single phase Submersible Motor Starter

The SubStartSC® range covers all PSC motors from 0.25kW to 2.2kW for all voltages. Ergonomic design, attention to detail and unique features make the SubStartSC® motor starter range your first choice when considering submersible motor protection. In conjunction with Franklin Electric submersible motors you now have an tangible water system advantage resulting in ease of installation and reliable protection.

Product features:

- Attention to detail – every aspect engineered for the application
- The complete package – The device is 100% compatible with the motor characteristics
- All in one name – Reliability backed by the leader in submersible motors



Ergonomically designed	
Mounting	Easy wall mounting without destroying the protection rating of the enclosure.
Wiring	Sufficient space is provided for ease of wiring.
Enclosure	
Protection	IP54
Material	PVC / Polycarbonat
Components	
ON/OFF switch	Illuminated integral ON/OFF switch for ease of power
Circuit breaker	Thermal circuit breaker for protection of the motor.
Capacitor	High quality motor run capacitor for long life
Terminal board	Terminal board suitable for ease of reliable connections
Cable glands	Cable glands to ensure IP54 rating

Technical Specifications:	
Mechanical	
Protection level	IP54
External dimensions	168 x 142 x 85mm
Weight	0,6 - 1,0 kg
Mounting	Wall mounting (mounting hardware provided)
Temperature	-5°C - +40°C
Humidity	50% at 55°C (without condensation)
Electrical	
Voltage	220 - 240V; - 6 / + 10 %; 50Hz single phase
Current	2,2 - 16 A
Power	0,25 - 2,2 kW
Standards	
IEC 60439-1	


SubStartSC® Starter Specifications

Part Number ¹	Type ²	Motor rating [kW]	Nominal Current ³ [A]	Maximal expected current ⁴ [A]	Capacitor [μF] 450V ac
284 623 3510	SS025SC	0,25	2,4	9,4	12,5
284 624 3510	SS037SC	0,37	3,3	12,6	16
284 625 3510	SS055SC	0,55	4,3	17,7	20
284 626 3510	SS075SC	0,75	5,7	22,7	35
284 627 3510	SS110SC	1,10	8,4	33,9	40
284 628 3510	SS150SC	1,50	10,7	41,7	50
284 629 3510	SS220SC	2,20	14,7	61,8	70

Notes:

1. Can be used with both 220-230V and 230-240V PSC motor ranges.
2. Type indicates motor power rating and motor type.
3. Nominal supply current at nominal voltage
4. Motor starting current under nominal conditions


Dimensions

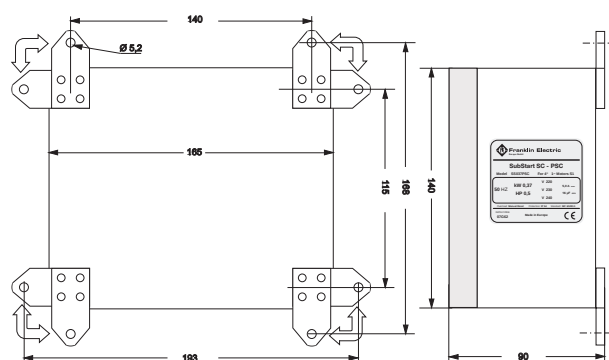



Franklin Electric

SubStartSC® Spare Parts

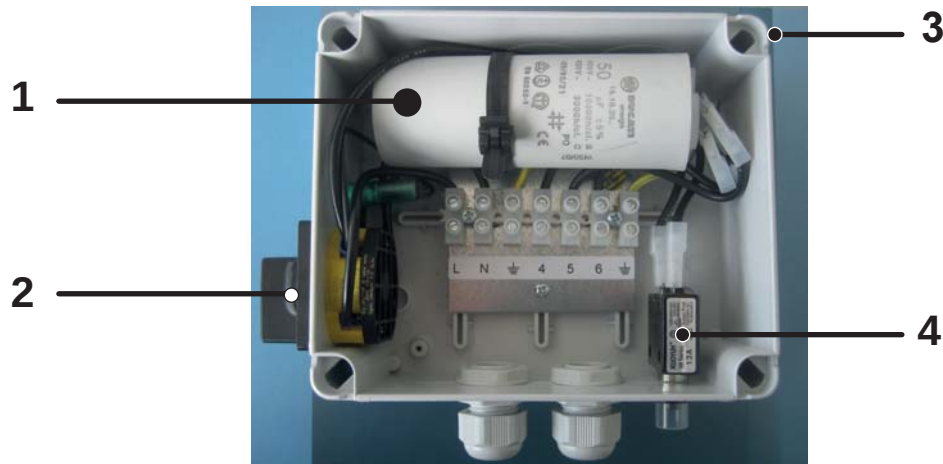

1 Part: Capacitor - Kit

Rating [kw]	Mod. Nb.		μF
0,25	308 005 801	-	12,5
0,37	308 005 802	-	16
0,55	308 005 803	-	20
0,75	308 005 804	-	35
1,1	308 005 805	-	40
1,5	308 005 806	-	50
2,2	308 005 807	-	70




4 Part: Overload - Kit

Rating [kw]	Mod. Nb.		Amp
0,25	308 005 811	-	3
0,37	308 005 812	-	5
0,55	308 005 813	-	6
0,75	308 005 814	-	8
1,1	308 005 815	-	10
1,5	308 005 816	-	13
2,2	308 005 817	-	18



2 Part: Rotary - Switch - Kit

Mod. Nb.
308 005 822



3 Part: Rocker - Switch - Kit

Mod. Nb.
308 005 821



SubTronicSC® Single Phase Motor Protection

The SubTronicSC® range covers all PSC motors from 0.25kW to 2.2kW for all voltages. Ergonomic design, attention to detail and unique features make the SubTronicSC® motor starter range your first choice when considering submersible motor protection. In conjunction with Franklin Electric submersible motors you now have an tangible water system advantage resulting in ease of installation and reliable protection.

Product features:

- Attention to detail – every aspect engineered for the application
- The complete package – The device is 100% compatible with the motor characteristics
- All in one name – Reliability backed by the leader in submersible motors



Ergonomically designed	
Mounting	Easy wall mounting offering various options without destroying the protection rating of the enclosure.
Wiring	Reliable connectors are provided for ease of wiring.
Motor compatible design	
Matching range	The SubTronicSC® Protector range was designed to match the Franklin Electric range of PSC motors.
Wide range of operation	Compatibility with motor design allows for a wide range of operation resulting in minimized nuisance tripping.
Intelligent Protection and Management features	
Dry-run detection (without probes)	Prevents motor and pump damage due to running the pump without water based on a proprietary reliable detection method.
Dry-run auto- reset	Automatic dry-run reset time is based on a proprietary search algorithm to find the best operating point for weak wells. Reset time 6 to 60 minutes.
Over & Under voltage	Prevents motor damage that may be caused by abnormal voltage conditions without limiting the range of operation, made possible by matching the design of the SubTronicSC® Protector with the motor. Reset time approximately 3 minutes.
Over current protection	Prevents operation under conditions where motor current may exceed safe levels due to bound pump or other fault condition. Detection is based on current heating capacity measurement to prevent unnecessary nuisance tripping. Reset time approximately 10 minutes.
Faulty Start Protection	Prevents system damage due to factors such as faulty contacts or switch. Contact failure detection reacts fast and will prevent damage to system components.
Rapid Cycle Protection	Prevents system damage due to factors such as continuous rapid cycling and excessive motor thermal cycling caused by waterlogged tank, faulty contacts or faulty pressure switch.
Indicators	
Status	Indication shows normal operation or other condition.
Voltage	Faulty voltage condition is indicated.
Fault conditions	Dry-run, Over current, Rapid Cycling, and Faulty start are indicated.


Technical Specifications

Mechanical	
Protection level	IP54
External dimensions	290 x 230 x 95mm
Weight	0,6 - 1,0 kg
Mounting	Wall mounting (with options)
Temperature	-5°C - +40°C
Humidity	50% at 55°C (without condensation)
Electrical	
Voltage	220 - 240V; ± 10 %; 50Hz single phase
Current	16 A
Power	0,25 - 2,2 kW
Standards	
IEC 60439-1 when supplied with suitably fused supply.	

SubTronicSC Motor Protection Specifications


Part Number	Type	Motor rating [kW]	Nominal Current [A]	Maximal expected current [A]	Capacitor [µF] 450V ac
284 623 3511	ST025PSC	0,25	2,4	9,4	12,5
284 624 3511	ST037PSC	0,37	3,3	12,6	16
284 625 3511	ST055PSC	0,55	4,3	17,7	20
284 626 3511	ST075PSC	0,75	5,7	22,7	35
284 627 3511	ST110PSC	1,10	8,4	33,9	40
284 628 3511	ST150PSC	1,50	10,7	41,7	50
284 629 3511	ST220PSC	2,20	14,7	61,8	70

Dimensions

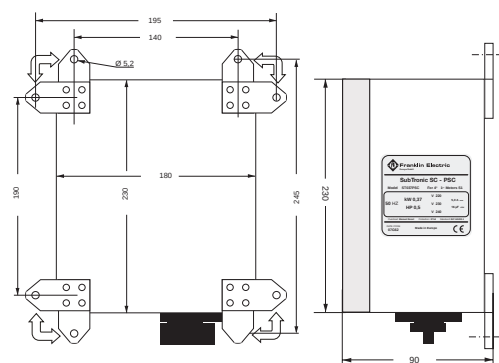



SubTronicSC® Spare Parts

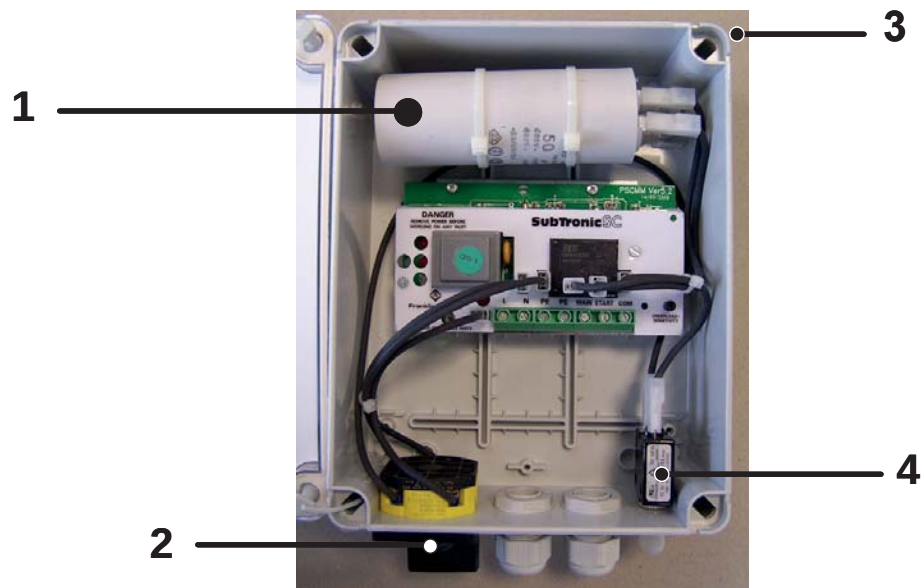

1 Part: Capacitor - Kit

Rating [kw]	Mod. Nb.		μF
0,25	308 005 801	-	12,5
0,37	308 005 802	-	16
0,55	308 005 803	-	20
0,75	308 005 804	-	35
1,1	308 005 805	-	40
1,5	308 005 806	-	50
2,2	308 005 807	-	70

4 Part: Overload - Kit

Rating [kw]	Mod. Nb.		Amp
0,25	308 005 811	-	3
0,37	308 005 812	-	5
0,55	308 005 813	-	6
0,75	308 005 814	-	8
1,1	308 005 815	-	10
1,5	308 005 816	-	13
2,2	308 005 817	-	18



2 Part: Rotary - Switch - Kit

Mod. Nb.
308 005 822

3 Part: Rocker - Switch - Kit

Mod. Nb.
308 005 821



Franklin Electric

Termination Kit 4"

This proven, sturdy solution is your choice of cable joining in temporary pump applications or when re-usage if the drop cable is desired. Furthermore, the flexibility and safety it provides for under field service conditions makes it the preferred choice over conventional, not breakable splicing kits.

Kit- Type	Mod. Number	Description
Standard	308 090 901	without . Strain relief Attention: Limited shelf life of Resin and Hardener
Strain Relief	308 090 902	incl. Strain relief Attention: Limited shelf life of Resin and Hardener



Double Plug Lead for Termination Kit

Required for use of lead termination kit. Connected between termination kit and 4" motor.

- PSC / 2-wire / 3-wire Motors and 3 ~ Motors up to 2,2kW
- Material: Connector- Ni plated brass; Lead: rubber
- 2 / 3 wire lead with ground
- Optional strain relief
- Max. current 16 amps.
- Approvals: KTW

4" High Thrust and Motor Design up to 06.2016

Mod. No.	2 - wire	Mod. No.	PSC / 3 - wire / 3-Phase (up to 2,2kW)
310 131 001	3X1,5mm ² 1,5 m - without . Strain relief	310 111 001	3X1,5+1G1,5mm ² 1,5 m - without . Strain relief
310 131 002	3X1,5mm ² 2,5 m - without . Strain relief	310 111 002	3X1,5+1G1,5mm ² 2,5 m - without . Strain relief
310 132 001	3X1,5mm ² 1,5 m - incl. Strain relief	310 112 001	3X1,5+1G1,5mm ² 1,5 m - incl. Strain relief
310 132 002	3X1,5mm ² 2,5 m - incl. Strain relief	310 112 002	3X1,5+1G1,5mm ² 2,5 m - incl. Strain relief



4" Standard Motor start 07.2016

Mod. No.	PSC / 3 - wire / 3-Phase (up to 2,2kW)
309 111 401	3X1,5+1G1,5mm ² 1,5 m - without . Strain relief



Lead Termination Kit 1,5 - 10mm²

- 3M Quality
 - 4 wire
 - 1,5 - 10mm²
 - up to 1,1kV
- Part number: 308 090 921**



PTC Lead (only as spare parts)

Ø = 2x0,75 mm ²	D = 7,0 mm	L (m)	Mod.-No.
		4	310 364 004
		10	310 364 010
		20	310 364 020
		30	310 364 030

Brackish Water Motor Lead (only as spare parts)

Ø = 4x1,5 mm ²	L (m)	Mod.-No.
	2,5	310 113 402G



Franklin Electric

4" Corrosion protection in aggressive water for Standard Motors

Wells with extremely high levels of chlorides and other elements in combination with high temperatures will aggressively attack and corrode nearly any type of metal, including stainless steel. Typical severe applications are geothermal wells and mine wells, and applications with low service times.

Material Specification: GG25

LT	HT
	
308 250 912	308 250 913

4" Corrosion protection in aggressive water for NextGen Motors

Wells with extremely high levels of chlorides and other elements in combination with high temperatures will aggressively attack and corrode nearly any type of metal, including stainless steel. Typical severe applications are geothermal wells and mine wells, and applications with low service times.

These sacrificial anodes, affixed to the motor body, will increase the service life of the motor when used in such environments.

Material Specification: GG25

LT

308 250 914

Motor Filling Liquid

Filling liquid 5 L FES92					
4" Encapsulated	→	FES93	8" Encapsulated Standard	→	FES91
6" Encapsulated Standard	→	FES91	8" Encapsulated HighTemp75	→	FES92
6" Encapsulated HighTemp90	→	FES92	6" / 8" / 10" / 12" Rew Motors 6" / 8" Rew PM Motors		FES93



Part number:
308 353 941

FES91	FES92	FES93
		

Motor Filling Kit

This kit contains all necessary tools to check and replenish Franklin Electric submersible motors with FES 91, 92 or 93 filling liquid (fill solution/concentrate must be ordered separately).

Part number: 308 726 103





Couplings

Franklin Electric offers this line of motor-pump couplings for maximum customer convenience in matching the Franklin motor to a variety of pump shafts. Couplings are designed to transmit the pump thrust to the motor in order to provide maximum benefits from the Franklin internal thrust bearing construction.

Hardened stainless steel spacer discs in the 4" and 6" couplings assure positive bearing between motor and pump shafts, and assure full support for downward thrust created by the pump.

8" couplings DO NOT contain hardened spacer discs, since the motor shaft itself is hardened.





4" Motor - Pump couplings

Application: Allow connection of pump to motors shaft.

Specification:

- Material: 304 / 316 SS
- NEMA standard measuring on motor shaft
- separation washer between motor & pump shafts

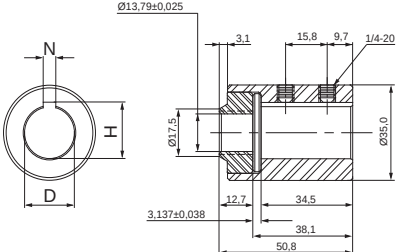Coupling 1	304			Coupling Insert only (316SS)
	151 551 911			151 970 102
	Dimension D Max. / Min.	Dimension N Max. / Min.	Dimension H Max. / Min.	
	19,075 / 19,063	4,838 / 4,788	20,70 / 20,53	
				

Coupling 2	316SS
	308 712 904
	Dimension D Max. / Min.
	17,50 / 17,48



Franklin Electric

Franklin Electric Europa GmbH
Rudolf Diesel Strasse 20
54516 Wittlich / Germany

franklin-electric.eu