




Franklin Electric


4" 3- wire High Thrust Motors Lengths & Weights

High Thrust 2,2 - 3,7kW

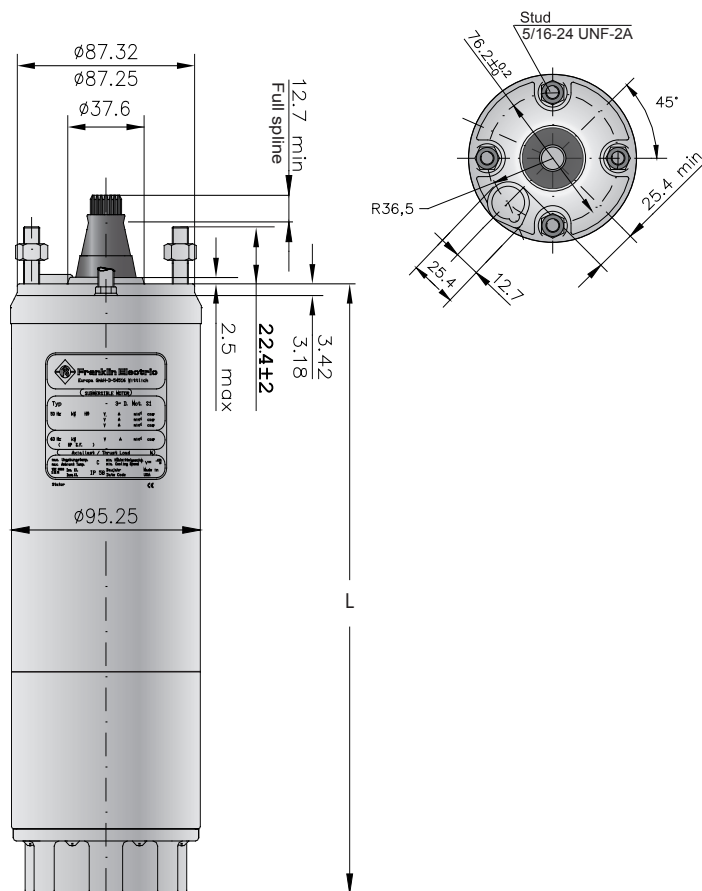

Tolerances according to NEMA MG 1-18.388

Material Description


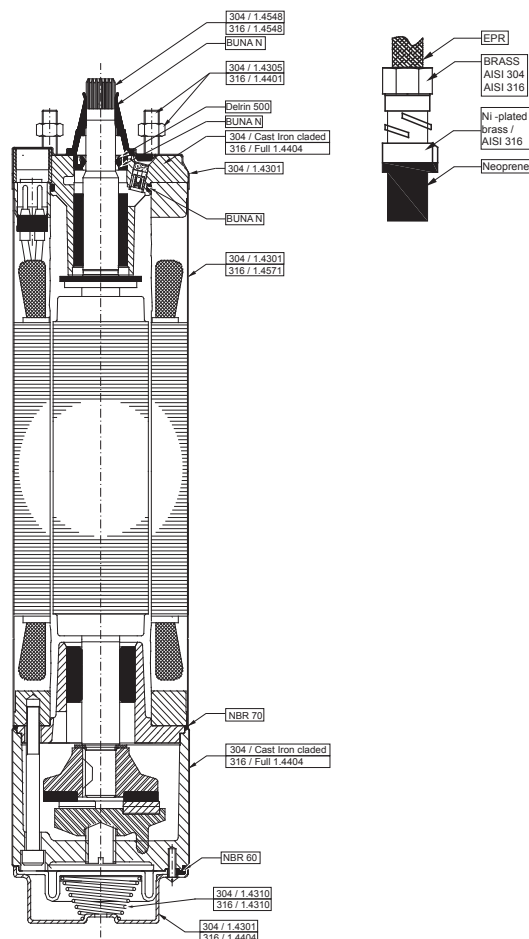


Standard High Thrust Version

P _N [kW]	304 L [mm]	316SS L [mm]	304 M [kg]	316SS M [kg]	Motor with Lead (in single pack)		
					[mm]	304 [kg]	316SS [kg]
2,2	520,2	529,4	21,3	21,8	796 x 100 x 110	23,1	23,6
3,7	652,5	661,7	26,4	27,3	904 x 100 x 110	28,5	29,4

3 wire High Thrust Motor- Flat Leads*


Ø [mm²]	B [mm]	B1 [mm]	H [mm]
3X1,5+1G1,5	16,8 ± 0,3	10,7 ± 0,3	5,0 ± 0,3



*Cables are designed for submerged operation. For air operation please consult Franklin Electric.

3 wire High Thrust Motor- Pollution Recovery Round Leads

Ø [mm²]	Ø D (mm)
4X1,5	9,8 ± 0,3



*Cables are designed for submerged operation. For air operation please consult Franklin Electric.