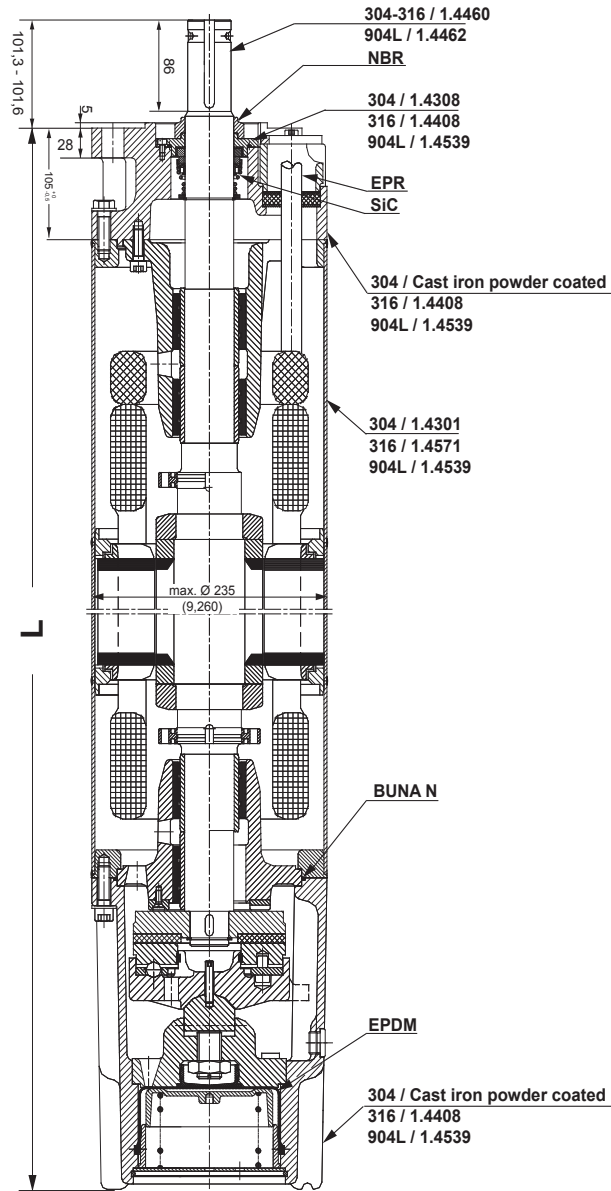




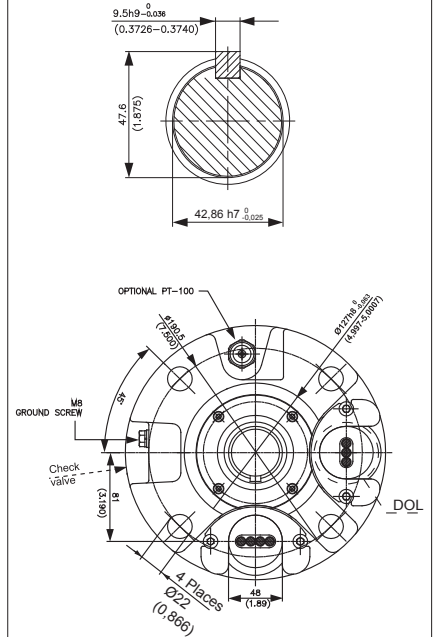
Franklin Electric

10" Wiederwickelbarer Motor - Design

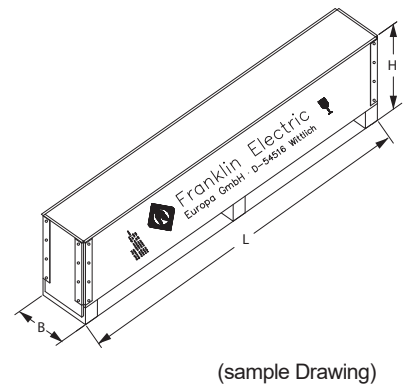
Motor - 304/316SS/904L



Adapter



Motor Box





P _N [kW]	Motorlänge	Motorgewicht [kg]		Frachtabmessungen[mm]		
	L [mm]	Motor	Incl. Pack	B	H	L
85	1419	280	326	341	562	1896
110	1529	315	361			
130	1659	362	412	341	562	2296
150	1769	413	463			
185	1919	449	499			





Franklin Electric

10" Wiederwickelbarer Motor - Motorkabel*

DOL									
Kabel	P _N [kW]	Ø [mm²]	B / H [mm]		Länge [m]	Qyt.	Kabel Mod.- Nr.	Kabeldichtung Kit 304 / 316SS Mod.- Nr.	Kabeldichtung Kit 904L Mod.- Nr.
	85	4G25	B	44,3	6	1	308 710 116	308 660 720	308 660 724
			H	14,5					
	110 – 130	4G35	B	48,5	6	1	308 710 117	308 660 721	308 660 725
			H	16,5					
	130 - 150 (PE2/PA)	3X50	B	46,5	6	1	308 710 113	308 660 712	308 660 726
			H	19,5					
	185**	1X70	D	20,7	6	3	308 711 100		
Erdleiter (optional)	P _N [kW]	Ø [mm²]	D Ø [mm]		Länge [m]	St.	Mod.-Nr.		
		1G25	13,0		8	1	308 053 080		

Für PE2/PA Motoren **muss** das Spezial Tape **700 541 688** dazu bestellt werden!

YΔ									
Kabel	P _N [kW]	Ø [mm²]	B / H [mm]		Länge [m]	Qyt.	Lead Mod.- Nr.	Kabeldichtung Kit 304 / 316SS Mod.- Nr.	Kabeldichtung Kit 904L Mod.- Nr.
 	85	3X16	B	28,8	6	1	308 710 118	308 660 722	308 660 727
			H	12,2					
		4G16	B	38,0		1			
			H	12,8					
	110 - 150	3X25	B	37,5	6	1	308 710 114	308 660 713	308 660 728
			H	16					
		4G25	B	44,3		1			
			H	14,5					
	185	4G35	B	48,5	6	1	308 710 121	308 660 723	308 660 729
			H	16,5					
		3X35	B	38,5		1			
			H	16,5					

Für PE2/PA Motoren **muss** das Spezial Tape **700 541 688** dazu bestellt werden!

Kabelloch-Verschluss Satz	85 – 185 kW DOL / YΔ	304 / 316	308 660 715
		904L	308 660 730

* Kabelauflegung für den Betrieb im Wasser, für in Luft bitte Rücksprache mit Franklin Electric.

** Bitte kontaktieren sie Franklin Electric.