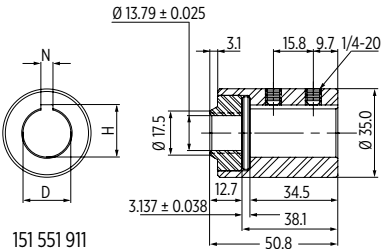
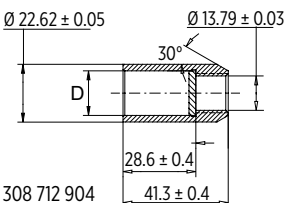



ACCESSORIES SUBMERSIBLE MOTORS

MOTOR/PUMP COUPLINGS

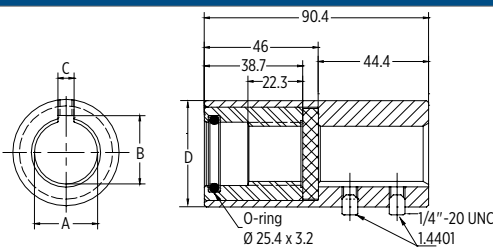

- Motor-pump couplings for matching Franklin Electric motors to a variety of pump shafts.
- Couplings are designed to transmit the pump thrust to the motor in order to provide maximum benefits from the Franklin internal thrust bearing construction.
- Hardened Stainless steel spacer discs in the 4" and 6" couplings assure positive bearing between motor and pump shafts and assure full support for downward thrust created by the pump. (8" couplings DO NOT contain hardened spacer discs, since the motor shaft itself is hardened.)

4" Motor/pump couplings

Description	Dimensions	
<ul style="list-style-type: none"> 4" motor/pump coupling NEMA Standard measuring on motor shaft separate washer between motor and pump shafts Material: 304SS / 316SS 		 

Model no.	Coupling Material DIN (AISI)	Dimension D [mm] Max. / Min.	Dimension N [mm] Max. / Min.	Dimension H [mm] Max. / Min.
151 551 911	304SS	19.075 / 19.063	4.838 / 4.788	20.70 / 20.53
308 712 904	316SS	17.50 / 17.48		

6" Motor/pump couplings

Description	Dimensions	
<ul style="list-style-type: none"> 6" motor/pump coupling NEMA Standard measuring on motor shaft separate washer between motor and pump shafts Material: 304SS / 316SS 		

Model no.	Coupling Material DIN (AISI)	Dimension A [mm] Max. / Min.	Dimension B [mm] Max. / Min.	Dimension C [mm] Max. / Min.	Dimension D [mm]
151 935 902	1.4005 (304SS)	19,075 / 19,063	20,70 / 20,52	4,84 / 4,79	43,0
151 935 922	1.4401 (316SS)				
151 935 910	1.4005 (304SS)	20,025 / 20,013	22,76 / 22,60	6,05 / 6,00	43,0
151 935 927	1.4401 (316SS)				
151 935 908	1.4005 (304SS)	22,025 / 22,013	25,53 / 25,32	8,03 / 7,98	43,0
151 935 928	1.4401 (316SS)				
151 935 901	1.4005 (304SS)	22,250 / 22,238	24,54 / 24,36	6,43 / 6,38	43,0
151 935 921	1.4401 (316SS)				
151 935 906	1.4005 (304SS)	25,025 / 25,013	28,70 / 28,30	8,03 / 7,98	43,0
151 935 926	1.4401 (316SS)				
151 935 909	1.4005 (304SS)	25,425 / 25,413	27,74 / 27,56	6,43 / 6,38	43,0
151 935 929	1.4401 (316SS)				

ACCESSORIES SUBMERSIBLE MOTORS

8" Motor/pump couplings

Description	Dimensions
<ul style="list-style-type: none"> ▪ Material: 304SS / 316SS ▪ NEMA standard measuring on motor shaft ▪ Separation washer between motor and pump shaft 	

Model no.	Coupling Material DIN (AISI)	Dimension A [mm] Max. / Min.	Dimension B [mm] Max. / Min.	Dimension C [mm] Max. / Min.
156 563 901	1.4005 (304SS)	25.425 / 25.413	28.27 / 28.17	6.38 / 6.32
156 563 921	1.4404 (316SS)			
156 563 902	1.4005 (304SS)	30.188 / 30.175	33.73 / 33.63	7.96 / 7.91
156 563 922	1.4404 (316SS)			
156 563 903	1.4005 (304SS)	31.775 / 31.763	35.36 / 35.26	7.96 / 7.91
156 563 923	1.4404 (316SS)	38.125 / 38.113		
156 563 904	1.4005 (304SS)	38.125 / 38.113	42.37 / 42.27	9.55 / 9.50
156 563 924	1.4404 (316SS)	38.125 / 38.113		
156 563 905	1.4005 (304SS)	19.085 / 19.063	20.70 / 20.52	4.84 / 4.79
156 563 906	1.4005 (304SS)	30.188 / 30.175	33.02 / 32.92	6.38 / 6.32
156 563 926	1.4404 (316SS)	30.188 / 30.175	33.02 / 32.92	6.38 / 6.32
156 563 907	1.4005 (304SS)	22.250 / 22.238	24.54 / 24.36	6.43 / 6.38
156 563 908	1.4005 (304SS)	22.024 / 22.011	25.53 / 25.32	8.03 / 7.98
156 563 931	1.4404 (316SS)			
156 563 929	1.4404 (316SS)	42.888 / 42.850	47.12 / 47.04	9.55 / 9.50