

SubStart3P[®]

Three Phase 4" Submersible Motor Starter

NEW



Doc.Nb.: 308 018 561



Franklin Electric

What does the **SubStart3P®** Three Phase Submersible Motor Starter offer you?

The SubStart3P® range covers all 3 phase motors from 0,37kW to 7,5kW. Ergonomic design, attention to detail and unique features make the SubStart3P® motor starter range your first choice when considering submersible motor protection. In conjunction with Franklin Electric submersible motors you now have an tangible water system advantage resulting in ease of installation and reliable protection.

Why should you choose the **SubStart3P®** Three Phase Submersible Motor Starter ?

The tables below summarize the technical attributes, specification and model parameters of the SubStart3P® range. The main differences between the SubStart3P® and other products are:

- Attention to detail – every aspect engineered for the application
- The complete package – The device is 100% compatible with the motor characteristics
- All in one name – Reliability backed by the leader in submersible motors

What are the **SubStart3P®** Three Phase Submersible Motor Starter Features and Benefits?

Ergonomically designed

Mounting	Easy wall mounting without destroying the protection rating of the enclosure.
Wiring	Sufficient space is provided for ease of wiring.
Enclosure	
Protection	IP54
Material	PVC / Polycarbonate
Components	
ON/OFF Switch	Manual motor starter switch
Circuit breaker	Integrated thermal and magnetic overload protection
Auxiliary relay	Powered auxiliary contactor for use with external switches
Cable glands	Ensure IP54 rating

SubStart3P® Three Phase Submersible Motor Starter Specifications

Model Parameters

Motor Rating (kW)	Type 3~ 400V 50Hz	Model Number	Nom. Current (A)	Starting Current (A)
0,37	SS037P3	288 500 3510	1,1	5,4
0,55	SS055P3	288 501 3510	1,6	7,4
0,75	SS075P3	288 502 3510	2	10,6
1,10	SS110P3	288 503 3510	2,8	16
1,50	SS150P3	288 504 3510	3,9	20,7
2,20	SS220P3	288 505 3510	5,5	29,8
3,0	SS300P3	288 506 3510	7,5	42
3,7	SS370P3	288 507 3510	9	52,3
4,0	SS400P3	288 508 3510	9,9	57
5,5	SS550P3	288 509 3510	12,6	77,2
7,5	SS750P3	288 510 3510	17,1	99,3

SubStart3P® Submersible Motor Control Starter Technical Specifications

Specifications

Mechanical Specification

Protection level	IP 54
Environment	This equipment is suitable for environment B according to IEC/EN 61439 - 1 : 2010
Altitude	max 2000m above sea level
External dimensions	190x184x106mm <= 4kW
	250x256x140mm >= 5,5kW
Weight	1,2 kg <= 4kW
	2,3 kg >= 7,5kW
Mounting	Wall mounting (mounting hardware provided)
Storage temperature	-25°C to +55°C
Operation temperature	-5°C to +40°C
Humidity	50% at 40°C (without condensation)

Electrical Specifications


Working Voltage	3~ / 50Hz 380 - 415V / -10% +6%
Voltage tolerance	380V -10% / 415V+6%
Rated insulation voltage	400 Vac
Rated short-time withstand current	50 kA
Rated conditional short-circuit current	50 kA
Current	5A, 9A, 16 A
Power	0,37kW - 7,5kW

Standards

IEC/EN 61439 - 1 : 2010

SubStart3P® Three Phase Submersible Motor Protector rear view dimensions

Motor Rating (kW)	B (mm)	L (mm)	H (mm)
0,37kW - 4,0kW	190	184	106
5,5kW - 7,5kW	250	256	140

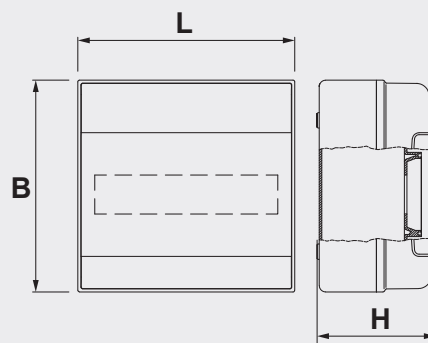

Franklin Electric Europa GmbH

D - 54516 Wittlich / Germany; Rudolf - Diesel - Straße 20
Tel.: +49 (0) 6571 105-0; Fax: +49 (0) 6571 105-520
e-mail: info@franklin-electric.de; www.franklin-electric.de